


Total Moisture Protection. 3 Easy Steps.

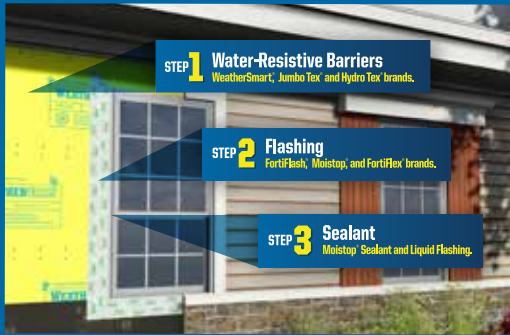

STEP 1

Weather Resistive-
Barriers

STEP 2

Flashings

This product qualifies as **Step 2** of the Fortifiber FortiShield® 15 year warranty when used in conjunction with other Fortifiber products.

See website for details:
www.fortifiber.com/warranty

STEP 3

Sealant

FortiShield® Warranty for FortiFlash® Butyl Flashing

FortiFlash Butyl Flashing is expressly warranted for a period of fifteen (15) years from purchase that it will perform to Fortifiber published specifications when installed according to Fortifiber installation procedures and accepted industry standards in a standard flashing application. Where Fortifiber published installation procedures are not applicable, installation details prepared by a properly licensed design professional must be employed. Installation must include one or more of the following Fortifiber brand weather-resistive barrier products (Hydro Tex®, Jumbo Tex®, WeatherSmart®, WeatherSmart Commercial or WeatherSmart Drainable) and must use Moistop Sealant and Liquid Flashing in a properly designed and constructed wall system. In installations that require taping, Fortifiber Sheathing Tape must also be used. In the event of a warranty claim, Fortifiber will pay the cost of materials and labor to correct problems found to be caused solely by the failure of Fortifiber product as expressly warranted above.

THIS EXPRESS WARRANTY IS GIVEN IN LIEU OF AND EXCLUDES ALL OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. The sole obligations of Fortifiber under this warranty are as set forth herein. In no event shall Fortifiber be liable for any lost revenue or profits, direct, indirect, special, incidental or consequential damages of any kind. If the installation or use of this product does not qualify for the FortiShield warranty, Fortifiber standard warranty will apply.

For warranty details, visit www.fortifiber.com/warranty