

PREFABRICATED EXPANSION  
JOINT BY OTHERS AS SPECIFIED

PAVER SYSTEM OR  
GRAVEL BALLAST

OPTIONAL MOISTURE  
RETENTION FABRIC

WATER RETENTION  
AND DRAINAGE  
COMPOSITE


INSULATION

OPTIONAL DRAINAGE  
COMPOSITE

**HENRY PRODEQ FX 400**  
(100 MILS)

PRIMER (SEE NOTE #2)

**HENRY PRODEQ FX 400**  
(40 MILS)

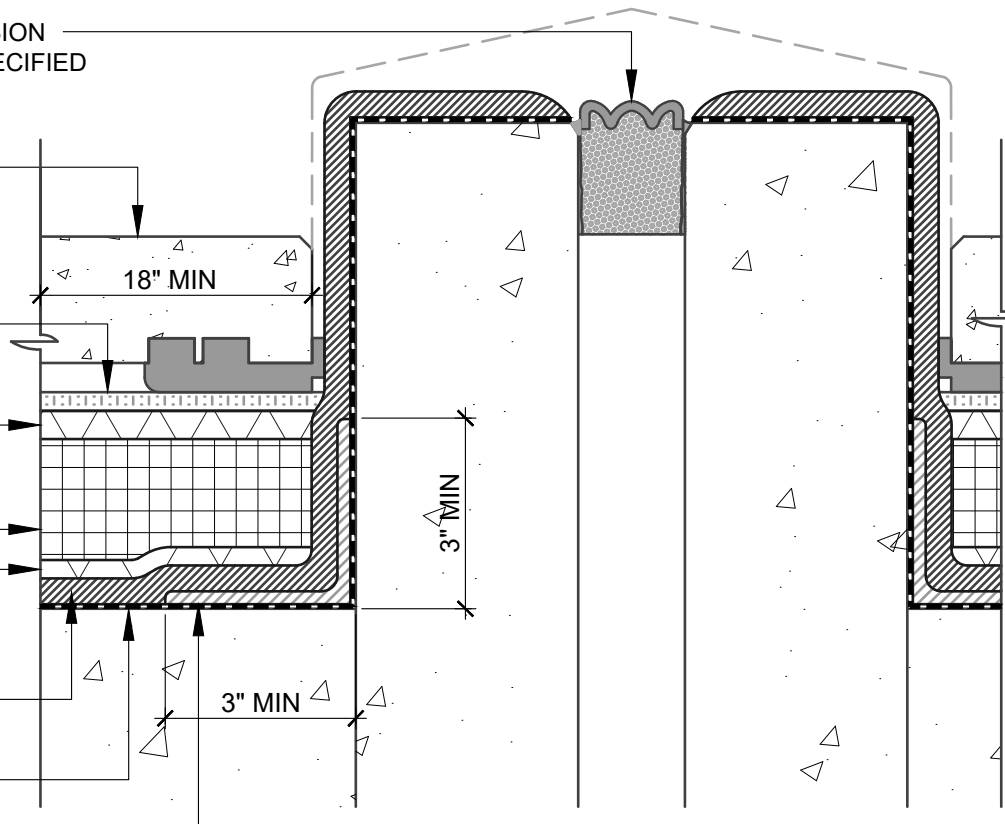

**NOTES:**

1. DETAIL SHOWS HENRY VEGETATIVE ROOFING WITH **PRODEQ** SYSTEM WATERPROOFING ASSEMBLY. SUBSTRATE SHOWN IS FOR REFERENCE ONLY. REFER TO PRODUCT SPECIFIC TECHNICAL DATA SHEET FOR AUTHORIZED SUBSTRATES.
2. THE STANDARD PRIMER FOR THE HENRY **PRODEQ** SYSTEM IS **HENRY ST PRIMER** WITH AGGREGATE. OTHER RECOMMENDED PRIMERS INCLUDE: **HENRY LV PRIMER**, **HENRY STXL PRIMER** WITH AGGREGATE, **PUMADEQ PRIMER 20** WITH AGGREGATE AND **HENRY GC EPOXY PRIMER**. REFER TO PRODUCT SPECIFIC DATA SHEET FOR PRODUCT SPECIFIC INFORMATION.
3. DO NOT INSTALL **PRODEQ** SYSTEM BEYOND PRIMED SURFACES.
4. DETAIL IS FOR REFERENCE ONLY. CONTACT EXPANSION JOINT MANUFACTURER FOR PROJECT SPECIFIC REQUIREMENTS.
5. EXPANSION JOINT MANUFACTURED AND INSTALLED BY OTHERS AS SPECIFIED. CONTACT HENRY FOR PROJECT SPECIFIC COORDINATION OF **PRODEQ** SYSTEM WITH EXPANSION JOINT.
6. DEPTH OF GROWING MEDIA MAY VARY DEPENDING ON PROJECT SPECIFIC REQUIREMENTS.
7. DETAIL IS FOR REFERENCE ONLY. REFER TO DESIGN PROFESSIONAL TO VERIFY WIND UPLIFT MINIMUM REQUIREMENTS.
8. REFER TO THE **PRODEQ** SYSTEM GUIDE SPECIFICATION AND WATERPROOFING DETAILS FOR RECOMMENDED INSTALLATION PROCEDURES.

**Henry**<sup>®</sup>

999 N. Pacific Coast Hwy, Suite 800  
El Segundo, CA 90245  
800-486-1278 • www.henry.com

MANUFACTURER GUIDE DETAILS ARE FOR REFERENCE ONLY. HENRY<sup>®</sup> DOES NOT ASSUME RESPONSIBILITY FOR ERRORS OR DEVIATIONS IN DESIGN OR ENGINEERING. PROJECT SPECIFIC VERIFICATION IS RECOMMENDED PRIOR TO INSTALLATION.

**VEGETATIVE ROOFING - PRODEQ SYSTEM**

**EXPANSION JOINT**  
**TYPICAL PRODEQ SYSTEM**  
**PREFABRICATED EXPANSION JOINT**

SCALE: N.T.S. 06-01-2020

**VR-PDEQ-8C**