




A step 1 component of the Henry® 1-2-3 Moisture Control System™



## Henry® Super Jumbo Tex 60 Minute® Weather-Resistive Barrier

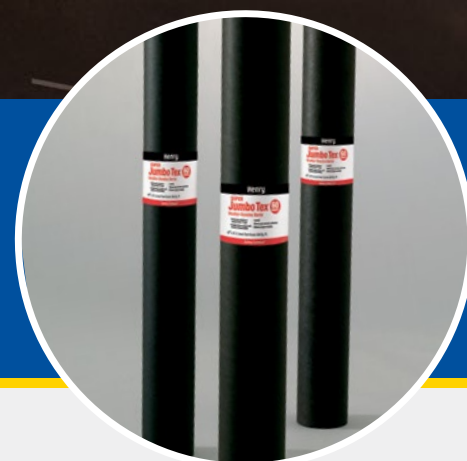







### The industry's leading 60 minute building paper

Henry® Super Jumbo Tex 60 Minute® is a premier-grade weather-resistive barrier specifically developed for use behind stucco, brick and fiber cement, metal, vinyl, and wood sidings.

It protects against water intrusion from the outside, while allowing moisture to escape from the inside. Designed for use within a variety of exterior wall assemblies, **Super Jumbo Tex 60 Minute** is suitable for both production and custom residential construction.

**Super Jumbo Tex 60 Minute** is designed to protect homes and commercial buildings from the internal wall damage caused by water intrusion. When used as part of the Henry® 1-2-3 Moisture Control System™ it is backed by an industry-leading 15-year material PLUS labor warranty.

### Features and benefits

-  6X the water protection of standard Grade “D” paper
-  Excellent balance between water resistance and permeability
-  Low VOC with excellent workability on the jobsite
-  Highly cost-effective protection against moisture
-  Ideal solution for stucco and stone applications
-  Part of approved NFPA 285 assemblies\*

\* See website for a complete report on approved NFPA 285 assemblies.

## Performance standards you can trust

**Super Jumbo Tex 60 Minute** is tested in accordance with ASTM procedures. It delivers excellent protection from internal wall damage due to water intrusion and condensation.

Physical/performance property	Typical value	Test method
<b>Water vapor transmission</b>	75 grams 11 perms (MVT)	ASTM E96 (A)
<b>Water resistance</b>	>60 minutes	ASTM D779
<b>Tensile strength</b>	MD - 80 lb./inch CD - 30 lb./inch	ASTM D828
<b>VOC Emissions</b>	Pass	CDPH Standard Method V1.1 (CA specification 01350)

### Product characteristics

<b>Composition</b>	Asphalt-saturated kraft Grade "D" breather type sheathing paper
<b>Roll size</b>	40" x 72 lineal ft.
<b>Weight</b>	6 lbs. per 100 sq. ft.

### Product approvals, certifications and specifications

Exceeds Federal Specification UU-B-790a, Type 1, Grade "D", Style 2
Exceeds ASTM E2556 Type II performance requirements
Complies with the International Code Council Evaluation Services Acceptance Criteria for Water Resistive Barriers (AC 38)
Complies as an alternative to the water-resistive barrier specified in Section 1404.2 of the 2012 and 2015 International Building Code® and Section 1403.2 of the 2018 International Building Code®
Complies as a water-resistive barrier specified in Section 2510.6 of the International Building Code®
Complies as an alternative to the water-resistant barrier specified in Section R703.2 of the International Residential Code®
Complies as water-resistant barrier specified in Section R703.6.3 of the 2012 International Residential Code® and Section R703.7.3 of the 2015 and 2018 International Residential Code®
Passed: California Department of Health Standard 01350 for VOC emissions
ICC Evaluation Service Report 1027
ASTM D779 – Standard Test Method for Water Resistance of Paper, Paperboard and Other Sheet Materials by the Dry Indicator Test Method
ASTM D828 – Tensile Properties of Paper and Paperboard Using Constant-Rate-of-Elongation Apparatus
ASTM E96 – Water Vapor Transmission of Materials
ASTM E2556 – Standard Specification for Vapor Flexible Sheet Water-Resistive Barriers Intended for Mechanical Attachment

**Limitations:** Product should be covered as soon as possible. Inspect product to insure it is free of any protrusions or damage which may detract from the weather-resistive barrier integrity. Holes, tears or punctures should be sealed with Moistop® Sealant or Henry Sheathing Tape. This product is not recommended for horizontal, below grade or roofing applications.

**Installation:** Super Jumbo Tex 60 Minute should be installed in accordance with the local applicable building code. The International Residential Code Section R703.2, states that weather-resistive barriers should be applied horizontally, with the upper layers overlapping the lower layer by a minimum of 2" (3" is recommended), and all vertical joints should be lapped a minimum of 6". To ensure the integrity of the weather-resistive barrier, Henry strongly recommends the use of two layers of a weather-resistive barrier with a three-coat stucco system. Verify local code requirements.

**Availability:** Henry products are distributed nationwide. For product information and pricing, please call a Henry distributor near you. If you need assistance locating a participating distributor, please call our Customer Service Department at 1-800-773-4777.

**Henry Product Warranty Information:** This product may be eligible for the 15-year Henry 1-2-3 Moisture Control System Warranty when used in conjunction with other products. See <https://us.henry.com/warranty> for details.

We, the manufacturer, warrant only that this product is free of defects, since many factors which affect the results obtained from this product – such as weather, workmanship, equipment utilized, and prior condition of the substrate – are all beyond our control. We will replace at no charge any product proved to have a material defect within 12-months of purchase, provided it has been applied in accordance with our written directions for uses we recommend as suitable for this product. Proof of purchase must be provided.

**DISCLAIMER OF WARRANTIES AND LIMITATION OF LIABILITY:** THIS LIMITED WARRANTY IS IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. NO ONE, INCLUDING THE MANUFACTURER, SHALL HAVE ANY LIABILITY OF ANY KIND BEYOND PRODUCT REPLACEMENT, INCLUDING FOR NEGLIGENCE OR FOR DIRECT, CONSEQUENTIAL, EXEMPLARY OR INCIDENTAL DAMAGES, RESULTING FROM ANY MISUSE, DEFECTS OR DELAYS CAUSED BY REPLACEMENT OR OTHERWISE. IF PURCHASER DOES NOT ACCEPT THESE TERMS, PURCHASER MAY RETURN WITHIN 30-DAYS OF PURCHASE ALL UNOPENED CONTAINERS OR PACKAGES OF PRODUCT PURCHASED FOR A FULL REFUND. RETENTION OF PRODUCT BEYOND 30-DAYS, OR USE OF PRODUCT SHALL CONSTITUTE ACCEPTANCE OF THESE TERMS, CONDITIONS, AND DISCLAIMERS. THIS LIMITED WARRANTY AND LIABILITY DISCLAIMER PROVIDES THE PURCHASER'S EXCLUSIVE REMEDY FOR ANYTHING RELATING TO THE PRODUCT.

To the extent that any part of this LIMITED PRODUCT WARRANTY AND LIABILITY DISCLAIMER is determined unenforceable under the law of the place of purchase of the product, that part is severed and the remainder of these terms remain in full force and effect. To the extent permitted by law, the duration of any implied warranties is limited to the duration of Henry's express warranty.

This warranty language supersedes any language found elsewhere, including product labels, sell sheets and/or technical documents.



Featuring a range of compatible weather barriers, flashings and sealants, the Henry® 1-2-3 Moisture Control System™ makes it easier than ever to build with confidence.

Henry, Moistop and Super Jumbo Tex are registered trademarks of the Henry Company



**Building Envelope Systems®**  
Wall & Window | Roof | Foundation

Ask us today about other Henry® solutions that help manage the flow of water, air, vapor and energy.