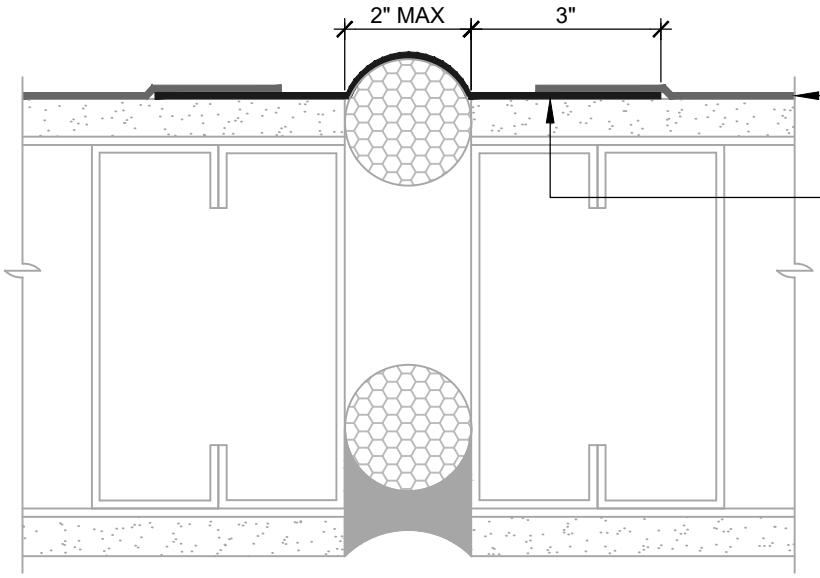

METAL CLAD
LAP AIR BARRIER 2" ONTO FLASHING

METAL CLAD
(SEE CONVEX LOOP FLASHING DETAIL)

GAPS UP TO 2" MAX (PLAN VIEW)

FLASHING INSTALLED BEFORE WRB

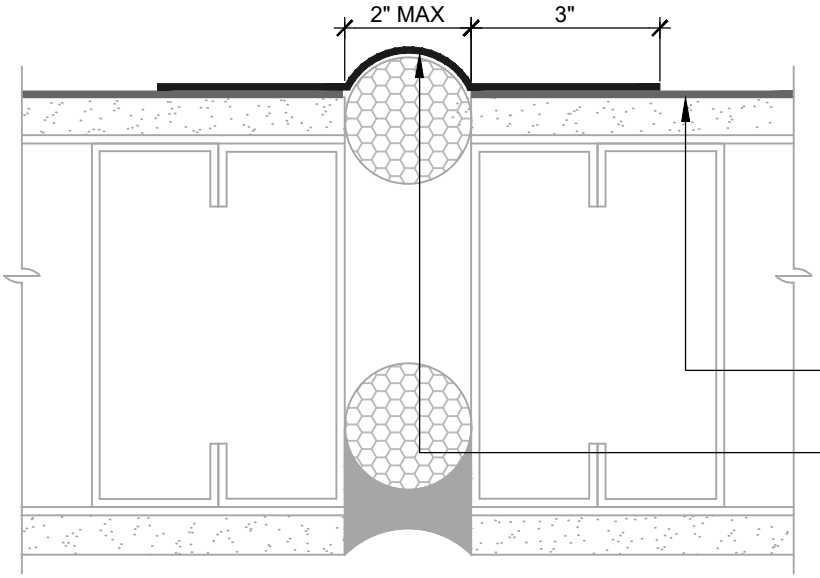

METAL CLAD

METAL CLAD
(SEE CONVEX LOOP FLASHING DETAIL)

GAPS UP TO 2" MAX (PLAN VIEW)

FLASHING INSTALLED AFTER WRB

CREATE CONVEX LOOP IN MEMBRANE OVER BACKER ROD. PRIOR TO INSTALLATION, ADHERE MEMBRANE TO ITSELF AND INSTALL TO PREVENT ADHESION TO BACKER ROD.



CONVEX LOOP FLASHING

"SIAMESE" FLASHING

NOTES:

1. DETAIL SHOWS **METAL CLAD SELF-ADHERED WATER RESISTIVE AIR BARRIER**. SUBSTRATE SHOWN IS FOR REFERENCE ONLY. ACCEPTABLE SUBSTRATES INCLUDE PLYWOOD, OSB, CONCRETE, CMU, METAL, AND EXTERIOR GRADE SHEATHING.
2. REFER TO PRODUCT SPECIFIC TECHNICAL DATA SHEET (TDS) FOR PRIMER REQUIREMENTS. OTHER FLASHING OPTIONS INCLUDE: **BLUESKIN BUTYL FLASH, BLUESKIN SA** OR **BLUESKIN SA LT.**
3. INSTALL **METAL CLAD** TO ACHIEVE A CONTINUOUS WATER-RESISTIVE BARRIER (WRB). INSULATION AND CLADDING NOT SHOWN FOR CLARITY. REFER TO LOCAL CODE ORDINANCES FOR INSULATION AND VAPOR BARRIER REQUIREMENTS.
4. REFER TO PRODUCT SPECIFIC TECHNICAL DATA SHEET (TDS) AND **METAL CLAD** GUIDE SPECIFICATION FOR INSTALLATION PROCEDURES.

Henry®
999 N. Pacific Coast Highway, Suite 800
El Segundo, CA 90245
800-486-1278 • www.henry.com

MANUFACTURER GUIDE DETAILS ARE FOR REFERENCE ONLY. HENRY DOES NOT ASSUME RESPONSIBILITY FOR ERRORS OR DEVIATIONS IN DESIGN OR ENGINEERING. PROJECT SPECIFIC VERIFICATION IS RECOMMENDED PRIOR TO INSTALLATION.

METAL CLAD SELF-ADHERED WATER RESISTIVE AIR BARRIER

NON-MOVING JOINTS

SUBSTRATE GAPS UP TO 2" WIDE MAXIMUM
SELF-ADHERED FLASHING

SCALE: N.T.S. | 08-12-2019

MTLCLD-8C