
PUMADEQ[™] SYSTEM WATERPROOFING ASSEMBLY WITH AN UNREINFORCED FIELD MEMBRANE - SEQUENCE OF INSTALLATION

- DECK/SUBSTRATE AS SPECIFIED
- (2) PUMADEQTM PRIMER 20 OR HENRY® GC PRIMER
- (3) UNREINFORCED PUMA FIELD MEMBRANE:

 - 3A PUMADEQ TM FLEX 30SL (GRAY 50 MILS) 3B PUMADEQ TM FLEX 30SL (WHITE 30 MILS)
- (4) WEAR COAT:
 - 4A **PUMADEQ[™] GRIP 40** (40 MILS)
 - 4B DRY SILICA SAND (SEE NOTE #3)
- (5) COLOR STABLE TOP COAT:
 - 5A HENRY® DEQCOATTM 50 (20 MILS)
 - 5B HENRY® DEQCOATTM 50 (12 MILS)

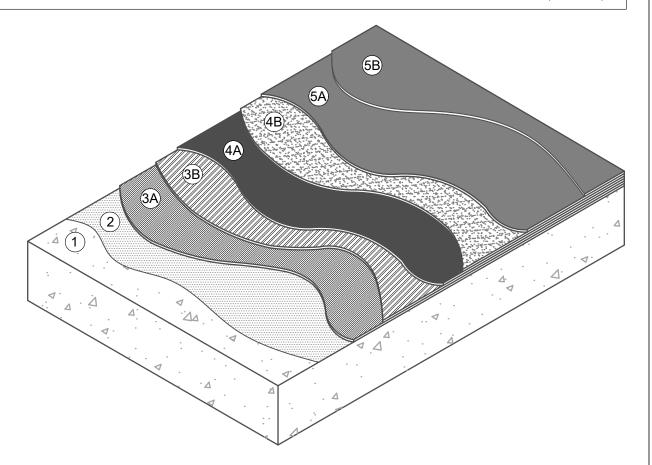

NOTES:

- DETAIL SHOWS HENRY® **PUMADEQ™** SYSTEM WATERPROOFING ASSEMBLY WITH AN UNREINFORCED FIELD MEMBRANE. SUBSTRATE SHOWN IS FOR REFERENCE ONLY. REFER TO PRODUCT SPECIFIC TECHNICAL DATA SHEET FOR AUTHORIZED SUBSTRATES.
- SURFACE PROFILES MUST MEET ICRI CSP 3-4. IF CSP 5, REFER TO REINFORCED **PUMADEQ[™]** SYSTEM DETAILS.
- FULLY BROADCAST, TO REJECTION, DRY SILICA SAND (SIEVE SIZE: #20-30) INTO WET **PUMADEQ™ GRIP 40.**
- PREPARE AND PRIME VERTICAL SUBSTRATES A MINIMUM 2" BEYOND **PUMADEQ**TM SYSTEM APPLICATION IN ACCORDANCE WITH HENRY PUMADEQTM SYSTEM SUBSTRATE PREPARATION GUIDELINES TECH-TALK BULLETIN.
- DO NOT INSTALL **PUMADEQTM** SYSTEM BEYOND PRIMED SURFACES.
- HENRY® OFFERS PAVERS, RIGID INSULATION, AND PREFABRICATED DRAINAGE COMPOSITES AS A SINGLE SOURCE WARRANTY OPTION PER PROJECT SPECIFIC REQUIREMENTS (NOT SHOWN FOR CLARITY). CONTACT HENRY® FOR SYSTEM CONFIGURATIONS AND WARRANTY OPTIONS.
- REFER TO **PUMADEQ™** SYSTEM GUIDE SPECIFICATION FOR RECOMMENDED INSTALLATION PROCEDURES.



MANUFACTURER GUIDE DETAILS ARE FOR REFERENCE ONLY. HENRY® DOES NOT ASSUME RESPONSIBILITY FOR ERRORS OR DEVIATIONS IN DESIGN OR ENGINEERING. PROJECT SPECIFIC VERIFICATION IS RECOMMENDED PRIOR TO INSTALLATION

PUMADEQ[™] SYSTEM - WATERPROOFING ASSEMBLY

SYSTEM DETAIL

UNREINFORCED FIELD MEMBRANE SURFACE PROFILES CSP3-4 WITH WEAR AND TOP COATS SCALE: N.T.S.

04-26-2019

PUMADEQ-WH

999 N. Pacific Coast Highway, Suite 800 El Segundo, CA 90245 800-486-1278 • www.henry.com