

WINDOW AND SILL PAN
BY OTHERS

PAVER SYSTEM OR
GRAVEL BALLAST

PERFORATED EDGE RESTRAINT

GROWING MEDIA
(VEGETATION NOT
SHOWN FOR CLARITY)

FILTER FABRIC

OPTIONAL MOISTURE
RETENTION FABRIC

WATER RETENTION AND
DRAINAGE COMPOSITE

INSULATION

OPTIONAL DRAINAGE
COMPOSITE


ROOT BARRIER

MODIFIEDPLUS G100S/S

HENRY 790-11/790-11EV
2-PLY 215 MIL REINFORCED
WITH POLYESTER FABRIC

HENRY 910 ASPHALT PRIMER OR
HENRY 930 POLYMER MODIFIED ADHESIVE

NEOFLASH OR HENRY 990-25
SET IN **HENRY 790-11** (125 MILS)

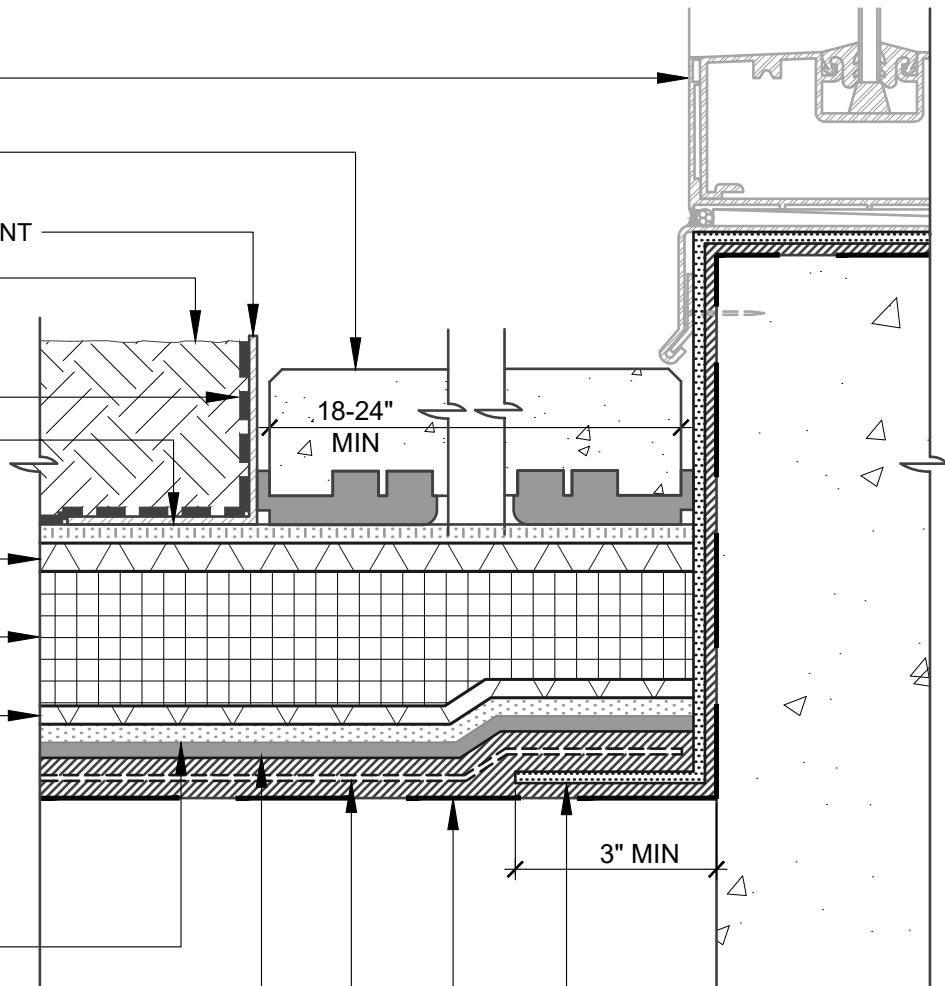

NOTES:

1. DETAIL SHOWS HENRY VEGETATIVE ROOFING WITH **HENRY 790-11/790-11EV** WATERPROOFING/ROOFING ASSEMBLY. SUBSTRATE SHOWN IS FOR REFERENCE ONLY. REFER TO PRODUCT SPECIFIC TECHNICAL DATA SHEET FOR AUTHORIZED SUBSTRATES.
2. DEPTH OF GROWING MEDIA MAY VARY DEPENDING ON PROJECT SPECIFIC REQUIREMENTS.
3. DETAIL IS FOR REFERENCE ONLY. REFER TO DESIGN PROFESSIONAL TO VERIFY WIND UPLIFT MINIMUM REQUIREMENTS.
4. REFER TO THE VEGETATIVE ROOFING GUIDE SPECIFICATION FOR RECOMMENDED INSTALLATION PROCEDURES.

Henry®

999 N. Pacific Coast Hwy, Suite 800
El Segundo, CA 90245
800-486-1278 • www.henry.com

MANUFACTURER GUIDE DETAILS ARE FOR REFERENCE ONLY. HENRY® DOES NOT ASSUME RESPONSIBILITY FOR ERRORS OR DEVIATIONS IN DESIGN OR ENGINEERING. PROJECT SPECIFIC VERIFICATION IS RECOMMENDED PRIOR TO INSTALLATION.

VEGETATIVE ROOFING - HENRY 790-11/790-11EV

WINDOW SILL CONCEALED FLASHING NEOFLASH OR HENRY 990-25

SCALE: N.T.S.

06-01-2020

VR-790-11-9B