

SET DOOR THRESHOLD PAN IN A  
BED OF WET SEALANT (BY OTHERS)

SEALANT (BY OTHERS)

OPTIONAL TOP COAT **HENRY DEQCOAT 50**

PAVER SYSTEM OR  
GRAVEL BALLAST

PERFORATED EDGE RESTRAINT

GROWING MEDIA  
(VEGETATION NOT  
SHOWN FOR CLARITY)

FILTER FABRIC

OPTIONAL MOISTURE  
RETENTION FABRIC

WATER RETENTION AND  
DRAINAGE COMPOSITE

INSULATION


OPTIONAL DRAINAGE  
COMPOSITE

ROOT BARRIER

**PUMADEQ FLEX 30SL (80 MILS)**  
REINFORCED WITH  
**PUMADEQ N-FLEECE**

**PUMADEQ PRIMER 20**  
OR **HENRY GC PRIMER**

**PUMADEQ FLEX 30SL (80 MILS)**  
REINFORCED WITH  
**PUMADEQ N-FLEECE**

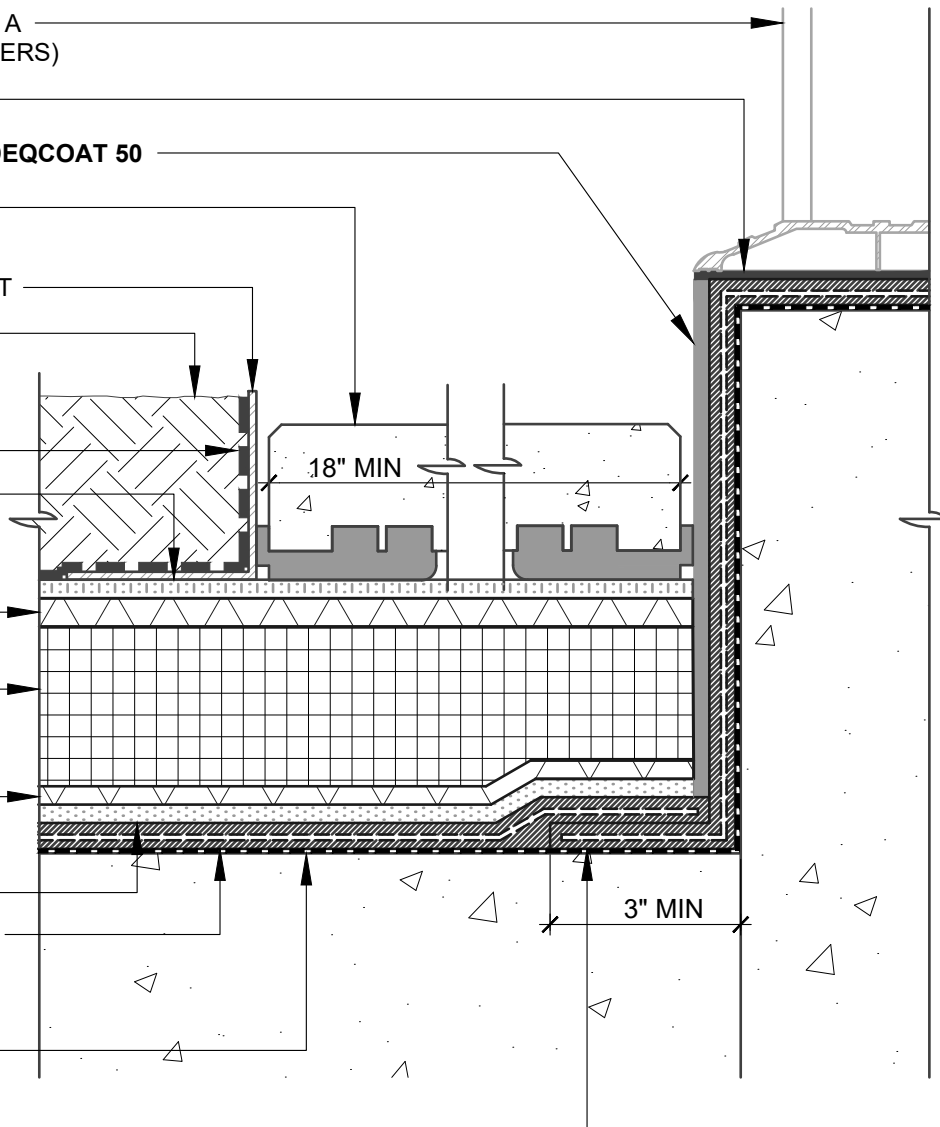

NOTES:

1. DETAIL SHOWS HENRY VEGETATIVE ROOFING WITH **PUMADEQ** SYSTEM WATERPROOFING ASSEMBLY WITH A REINFORCED FIELD MEMBRANE. SUBSTRATE SHOWN IS FOR REFERENCE ONLY. REFER TO PRODUCT SPECIFIC TECHNICAL DATA SHEET FOR AUTHORIZED SUBSTRATES.
2. DO NOT INSTALL **PUMADEQ** SYSTEM BEYOND PRIMED SURFACES.
3. BACK COAT FLEECE ON VERTICAL SURFACES WITH **PUMADEQ** RESIN.
4. DEPTH OF GROWING MEDIA MAY VARY DEPENDING ON PROJECT SPECIFIC REQUIREMENTS.
5. DETAIL IS FOR REFERENCE ONLY. REFER TO DESIGN PROFESSIONAL TO VERIFY WIND UPLIFT REQUIREMENTS.
6. REFER TO THE **PUMADEQ** SYSTEM GUIDE SPECIFICATION AND WATERPROOFING DETAILS FOR RECOMMENDED INSTALLATION PROCEDURES.

**Henry**<sup>®</sup>

999 N. Pacific Coast Hwy, Suite 800  
El Segundo, CA 90245  
800-486-1278 • www.henry.com

MANUFACTURER GUIDE DETAILS ARE FOR REFERENCE ONLY. HENRY<sup>®</sup> DOES NOT ASSUME RESPONSIBILITY FOR ERRORS OR DEVIATIONS IN DESIGN OR ENGINEERING. PROJECT SPECIFIC VERIFICATION IS RECOMMENDED PRIOR TO INSTALLATION.

**VEGETATIVE ROOFING - PUMADEQ SYSTEM**

**DOOR THRESHOLD  
REINFORCED FIELD MEMBRANE (CSP 3-5)  
UPTURN FLASHING AT DOOR THRESHOLD**

SCALE: N.T.S.

06-01-2020

**VR-PUMA-R9A**