


1. DECK/SUBSTRATE AS SPECIFIED
2. **PUMADEC PRIMER 20 OR HENRY GC PRIMER**
3. **PUMADEC FLEX 30SL** (GRAY - 50 MILS)
4. **PUMADEC FLEX 30SL** (WHITE - 30 MILS)
5. ROOT BARRIER
6. OPTIONAL DRAINAGE COMPOSITE
7. INSULATION
8. WATER RETENTION AND DRAINAGE COMPOSITE
9. OPTIONAL MOISTURE RETENTION FABRIC
10. FILTER FABRIC
11. GROWING MEDIA
12. VEGETATION
(NOT SHOWN FOR CLARITY)

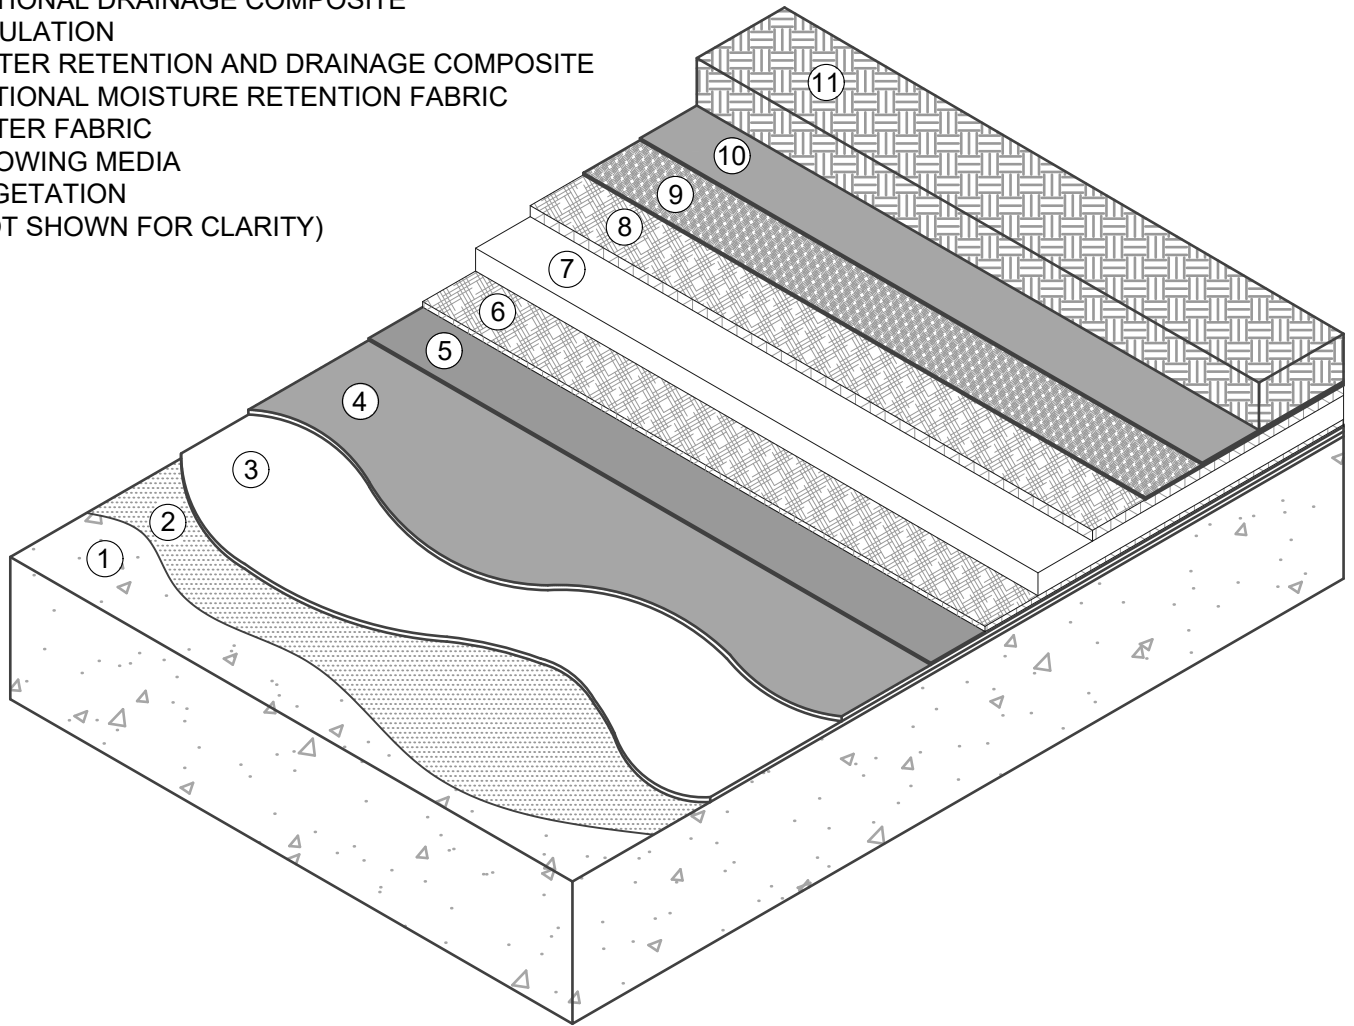

NOTES:

1. DETAIL SHOWS HENRY VEGETATIVE ROOFING WITH A **PUMADEC** SYSTEM WATERPROOFING ASSEMBLY WITH AN UNREINFORCED FIELD MEMBRANE. SUBSTRATE SHOWN IS FOR REFERENCE ONLY. REFER TO PRODUCT SPECIFIC TECHNICAL DATA SHEET FOR AUTHORIZED SUBSTRATES.
2. SURFACE PROFILES MUST MEET ICRI CSP 3-4. IF CSP 5, REFER TO REINFORCED **PUMADEC** SYSTEM DETAILS.
3. REFER TO **PUMADEC** WATERPROOFING DETAILS FOR SYSTEM OPTIONS INCLUDING LONG-TERM COLOR STABILITY, HEAVY CONSTRUCTION TRAFFIC OR ASSEMBLIES WHERE OVERBURDEN BONDS DIRECTLY TO **PUMADEC** SYSTEM.
4. DO NOT INSTALL **PUMADEC** SYSTEM BEYOND PRIMED SURFACES.
5. DEPTH OF GROWING MEDIA MAY VARY DEPENDING ON PROJECT SPECIFIC REQUIREMENTS.
6. DETAIL IS FOR REFERENCE ONLY. REFER TO DESIGN PROFESSIONAL TO VERIFY WIND UPLIFT REQUIREMENTS.
7. REFER TO THE **PUMADEC** SYSTEM GUIDE SPECIFICATION AND WATERPROOFING DETAILS FOR RECOMMENDED INSTALLATION PROCEDURES.

Henry[®]

999 N. Pacific Coast Hwy, Suite 800
El Segundo, CA 90245
800-486-1278 • www.henry.com

MANUFACTURER GUIDE DETAILS ARE FOR REFERENCE ONLY. HENRY DOES NOT ASSUME RESPONSIBILITY FOR ERRORS OR DEVIATIONS IN DESIGN OR ENGINEERING. PROJECT SPECIFIC VERIFICATION IS RECOMMENDED PRIOR TO INSTALLATION.

VEGETATIVE ROOFING - PUMADEC SYSTEM

SYSTEM DETAIL
UNREINFORCED FIELD MEMBRANE
SURFACE PROFILES CSP 3-4

SCALE: N.T.S. | 06-01-2020

VR-PUMA-U1A